C.A.Technologies

US MADE

Jaguar 100C

100 Series Conventional General Purpose

The Jaguar 100C is a high quality general purpose gravity feed spray gun. Designed with an all stainless steel fluid passage, this spray gun is perfect for all coatings from thin to thick. Available with carbide tipped fluid nozzles.

Jaguar 100C Features

- Forged Aluminum Body
- Stainless Steel Fluid Passages
- Perfect for thin to thick coatings
- Available carbide tipped fluid nozzles for abrasive materials.
- J100C-28-2268 setup is ideal for gelcoats

Jaguar 100C

"Conventional Dependability"

Gravity Cups

700 mL (Plastic)
51-400

700 mL (Aluminum)
51-401

1000 mL (Aluminum)
51-403

Accessories

Mini Gun Regulator
52-300

Magnetic Gravity Gun Stand
51-432

Coating Atomization Technologies: 337 S. Arthur Ave. Louisville, CO 80027
Phone: 888.820.4498, Fax: 303.438.5708
www.spraycat.com

C.A.Technologies

US MADE

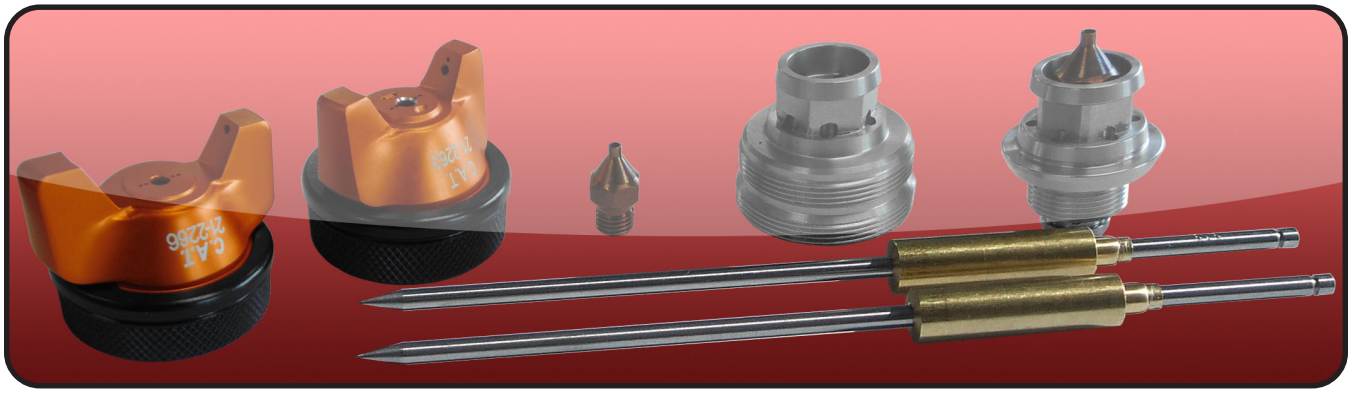

Nozzle Chart for Jaguar 100C

Material Type	Fluid Orifice x Air Cap	Maximum Pattern Width	CFM
Very Thin less than 16 sec. Zahn #2 inks, dyes, solvents, stains	**0.6, 0.7 mm x 2166** **0.6, 0.7 mm x 2266**	**9** **12**	**5** **12**
Thin 16 to 20 sec. Zahn #2 lacqers, enamels, primers, sealers	**0.6, 0.7, 1.0 mm x 2166** **0.6, 0.7, 1.0 mm x 2266** **0.6, 0.7, 1.0 mm x 2466**	**9** **12** **13**	**5** **12** **15**
Medium 21 to 30 sec. Zahn #2 automotive base coat enamels, primers, epoxies, urethanes, automotive clear coat	**1.2, 1.3, 1.5, 1.8 mm x 2266** **1.2, 1.3, 1.5, 1.8 mm x 2366** **1.2, 1.3, 1.5, 1.8 mm x 2266-3** **1.2, 1.3, 1.5, 1.8 mm x 2466**	**10** **10** **15** **13**	**12** **12** **16.2** **15**
Heavy over 30 sec. Zahn #2 heavy body primers, high solid enamels, high solid automotive coatings, adhesives	**1.5, 1.8 mm x 2466** **1.5, 1.8 mm x 2266-3** **2.2 mm x 2467** **2.8 mm x 2268**	**13** **15** **14** **14**	**15** **16.2** **15** **15**

Air Caps for Jaguar 100C

Air Caps	Fluid Tip Range	Max Inlet Pressure	CFM @ Max Inlet Pressure
21-2166	**0.6 - 1.8**	**50 PSI**	**5 CFM @ 50 PSI**
21-2266	**0.6 - 1.8**	**50 PSI**	**12 CFM @ 50 PSI**
21-2266T	**0.6 - 1.8**	**50 PSI**	**12 CFM @ 50 PSI**
21-2366	**0.6 - 1.8**	**50 PSI**	**12 CFM @ 50 PSI**
21-2466	**0.6 - 1.8**	**50 PSI**	**15 CFM @ 50 PSI**
21-2266-3	**0.6 - 1.8**	**50 PSI**	**16.2 CFM @ 50 PSI**
21-2266-3T	**0.6 - 1.8**	**50 PSI**	**16.2 CFM @ 50 PSI**
21-2467	**2.2**	**50 PSI**	**15 CFM @ 50 PSI**
21-2268	**2.8**	**50 PSI**	**15 CFM @ 50 PSI**

Coating Atomization Technologies: 337 S. Arthur Ave. Louisville, CO 80027
Phone: 888.820.4498, Fax: 303.438.5708
www.spraycat.com