

C-20 AAA

20:1 AIR ASSIST AIRLESS UNIT



FEATURES:

- Durable and Dependable Pump for Continuous Operation
- 100 psi maximum inlet pressure. 2000 psi maximum fluid pressure.
- 2 GPM displacement for automatic multiple gun applications (8 guns up to 13 thousandths tip)
- Separate fluid section fluid filter with multiple outlets optional
- Available with cart mount or wall mount, 5 or 55 gallon siphon assemblies
- Throat seal is completely inclosed to reduce contamination with a sight gauge for ease of checking lubricant levels
- New “CAT Fast Clamp” makes for easy and rapid removal for maintenance of the fluid section from the air motor
- Pumps come standard with an all stainless steel fluid section and can be used for most solvent and waterborne coatings, paints, pigmented lacquers, pre and post catalyzed materials and primers
- C-20 pumps are available for single or multiple gun outfits for use with the Bobcat, Cougar, or Bobcat Automatic Guns.

C.A. Technologies is proud to introduce the newest addition to the CAT pump line - the C-20 AAA. Designed with a 20 to 1 fluid ratio for higher viscosity materials and multi-gun operation, incorporates a totally enclosed throat seal to reduce contamination. The fluid section and air motor are built for easy “field” repairs with fewer parts lowering maintenance costs and equipment down time. The magnetic no stall trip mechanism insures smooth pump stroke transition with virtually no “surge” or “wink” in spray pattern. The standard fluid section utilizes a spring seal configuration on the lower and self-adjusting “V” packing on the upper. An optional self-adjusting “V” packing for the lower is available for abrasive coatings.




C-20 AAA

20:1 FINE FINISH SERIES PUMP OUTFITS

 <p>C-20 Wall Mount</p>	 <p>AAA 3/16" Fluid Hose 1/4" Air Hose</p>	 <p>C-20 Cart Mount</p>
 <p>Cougar AAA</p>	 <p>Auto Bobcat</p>	 <p>Bobcat AAA</p>

Bobcat Air Assist Airless Automatic Guns

CAT's Bobcat Automatic guns have been out for almost 1 year and the feedback has been very good. We have placed these guns on many different brands and types of automatic machines with great success. With the C-20 pump now available, we can supply the equipment package for new machines or update existing machines at a great price.

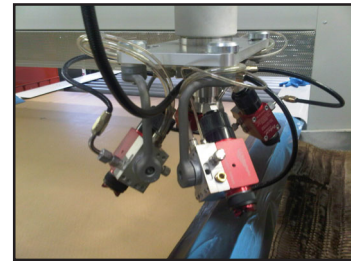

C-20 PUMP & OUTFIT SELECTION GUIDE

	Upper Seal	Lower Seal	Fluid Inlet	Fluid Outlet	Mounting/Siphon Assy	QTY of Guns	Gun + Tip	QTY of Hose	Hose 3/16"
C-20	S= SELF ADJUSTING	U= U CUP	0= 3/4" NPT (F)	0= 1/2" NPT (F)	C0= CART, NO SIPHON	0	0= NO GUN	0	0= NO HOSE
	M= MANUAL TAKE-UP	P= V- PACKING	4= 1/2" SAE (M)	2= 1/4" NPS (M)	C5= CART, 5 GAL SIPHON	1	B= BOBCAT	1	A= 25' HOSE
			6= 3/4" SAE (M)	F= Filter Assy	C55= CART, 55GAL SIPHON	2	C= COUGAR	2	B= 35' HOSE
				FSS= Stainless Steel Filter Assy	W0= WALL, NO SIPHON	3	AB= AUTO BOBCAT	3	C= 50' HOSE
					W5= WALL, 5GAL SIPHON	4		4	
					W55= WALL, 55 GAL SIPHON	5		5	
						6		6	
						7		7	
					8		8		

**The top row of each column will be used as the standard default if an option in that column is not selected. For multiple gun and hose packages, please add requested quantities after the gun letter, and hose numbers.

i.e. C20-MU42-C5-2B411-2A (20:1 pump with manual take-up upper seal, U cup lower seal, 1/2" inlet, 1/4" outlet, cart mounted 5 gal siphon, (2) bobcat guns and (2) 25' hose assemblies)**

C-20 ACCESSORIES



91-215
AAA TIP
CLEANING NEEDLES



52-410 (STD Fluid Filter Assy)
52-420 (S.S. Fluid Filter Assy)



74-520 1/2" 5 Gal Siphon Hose Assy
74-524 1/2" 55 Gal Siphon Hose Assy
74-530 3/4" 5 Gal Siphon Hose Assy
74-531 3/4" 55 Gal Siphon Hose Assy



74-562 (1/2")
Siphon Hose
Filter Assy



74-511 (1/2")
Siphon Hose
Filter Assy